



ACOUSTIC

UNITS FOR TRAFFIC LIGHTS





SAFE

MOBILITY FOR

EVERYONE

In the 21st century, intelligent mobile societies leave no one behind. The needs of people with special requirements are increasingly taken into consideration in road travel. Safe guidance over the roadway is an absolute must. Thanks to technological solutions for traffic light installations (LZA), blind and partially sighted persons can also actively take part in social life.

“BLX” acoustics from RTB take into account two further aspects that have recently emerged and proven to be very important.


#### THE BEST PROTECTION FOR LOCAL RESIDENTS

Whoever lives near an traffic light has the right to as little noise as possible. Thanks to the optimal sound wave directionality, the acoustics of RTB offer local residents unrivaled protection. In addition, the devices can be controlled depending on the ambient noise level.

#### HIGH EASE OF INSTALLATION

The signal manufacturing industry and municipalities are looking to install additional devices to a traffic light as quickly and easily as possible. In close consultation with practical specialists, a particularly affordable variant has been developed that can be socket-mounted directly on a mast.





## MADE IN GERMANY

In the area of additional equipment for traffic lights, this German technology has prevailed on the market worldwide. Everyone involved can be proud that the product developments bearing the “Made in Germany” seal of quality have become an international standard over the past two decades.

The latest generation of RTB acoustics, with the product name “BLX,” will help to further spread German technology throughout the world. Due to the already predictable growth in unit sales volume, the devices can be offered on particularly attractive terms.





# TECHNOLOGY & USAGE

## STANDARDS AND GUIDELINES

Compliance with relevant standards and guidelines is documented by test reports and certifications from accredited test centers, including TÜV Rheinland (the German Association for Technical Inspection for the Rhine region). Testing was performed on the basis of type examinations. The product standards thereby define the requirements for functional and electrical safety, electromagnetic compatibility and acoustic properties. Among others, the following product standards have already been fulfilled; further specifications can be fulfilled at any time.

- DIN VDE 0832-100 and HD638S1
- DIN VDE 0832-200 and EN50293:2012
- DIN 32981 and ISO 23600:2007
- ÖNORM V 2100 and V 2101
- CEI 214-7

The updated standard DIN 32981 requires self-testing by the signal transmitter for all safety-related operating values. Impermissible deviations lead to device locking, which can only be manually reset. An important innovation is that the microphone/loudspeaker may not be covered up by passers-by. This is achieved by a mounting height of 210-250 cm.

## TECHNICAL INFORMATION

### ACOUSTIC SIGNALS


- Pilot signal: 1.2 Hz  $\pm$  0.2 Hz pulsed sound with a range of approximately 4.5 m around the mast
- Release signal: Composite signal of harmonious frequencies, with a dominant base frequency of 880 Hz  $\pm$  50 Hz
- Warning signal/gong: 392 Hz warning signal as per DIN32974
- And many more

### HOUSING

- Polycarbonate material, available in the colors Fir Green, Black and Pebble Gray
- Protection Class II as per DIN EN 61140
- Protection Class IP 55 as per DIN EN 60529

### VOLTAGE VARIANTS

- 230 VAC, and 160 V dimming function
- 110 VAC
- 40 VAC or DC, and 27 V dimming function



## INTERNATIONALLY AND INDIVIDUALLY DEPLOYABLE

Nowadays, the acoustic units from RTB are in use around the world. Of course, they must be adapted to meet national requirements, for example, the standard acoustic signals or the power supply for a specific country.

An important factor everywhere is the automatic adjustment of the volume level in relation to the ambient noise level, as well as the flexibility of sound wave directionality according to the road width and other structural characteristics.



After installation, the remote control offers flexible configuration options (also in English) for individually adjusting the signaling at the crossing.

Various customized features can be implemented through optocoupler inputs and outputs. These include, for example, a shutdown at certain times of the day or a volume reduction at night.





# VARIANTS

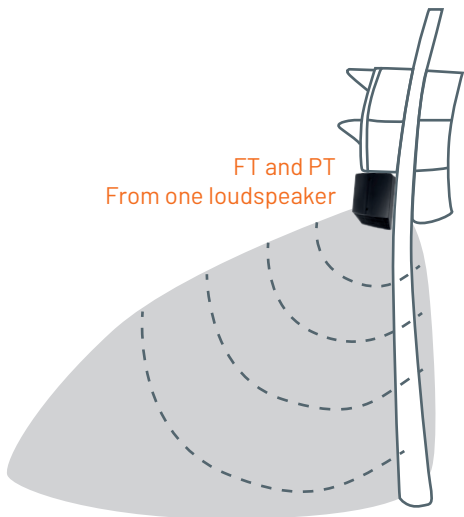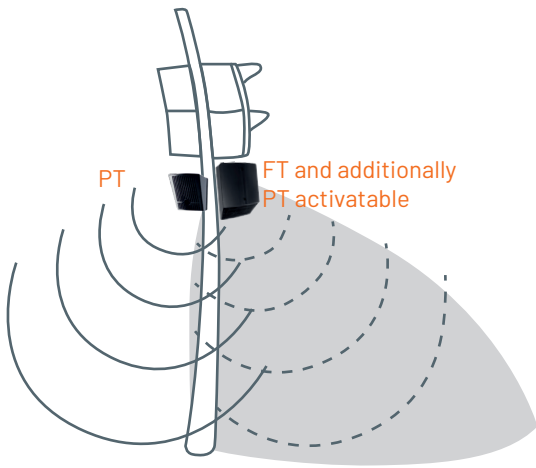

## VERSATILE DEVICE TYPES


RTB has gradually expanded and refined its performance and product range. With the fourth generation of acoustic units, municipalities have access to a system that can always be recombined and set up to meet individual needs thanks to its modular construction design.

## SINGLE DEVICES

Single devices have their own electronics and a separate loudspeaker. Both the release signal (FT) and the pilot signal (PT) are available as single devices.

## COMBINED DEVICES

The combined devices are impressive because of their cost-saving combination of release and pilot signal. The values for the release and pilot signal can be freely adjusted for these devices, as well.



Single Device  
BLX FTM



The BLX FTM acoustic device is a single device for the generation and output of the release signal. This is defined by the respective standard of the country or as requested by the user. It sounds off during the pedestrian green phase and continues emitting up to the middle of the crosswalk. The volume is determined by the length of the crosswalk and the buildings that are present.

Single Device  
BLX PT



The BLX PT acoustic device is a single device for the generation and output of the pilot signal (orientation signal). The pilot signal indicates the position of the system to blind persons. It is emitted all around the mast and directs the user to proceed toward the mast. The pilot signal also adapts to the ambient noise level and its values can be freely adjusted.

BLX  
Kombi



The combined unit consists of two loudspeakers that separately emit the release and the pilot signal. The major advantage: the device requires only one electronics system.

BLX  
Kombi-S



The BLX Kombi-S has an electronics system and a loudspeaker that emits both signals toward the pedestrian crossing. We recommend the combination with the push-button Plus PiT.

Kombi-200



The Kombi-200 contains the entire electronics system (including loudspeakers) in an additional optical signal housing. This solution is suitable for traffic light signal systems that only offer minimal space for an acoustic unit. In addition, the 200 Series also includes single devices to output the release signal (FTM200) or the pilot signal (PT200).


BLX Gong



The BLX Gong emits an acoustic warning signal to indicate dangerous points. It complies with the requirements of the DIN 32974 standard (Acoustic signals in a public area).



# OPTIONS

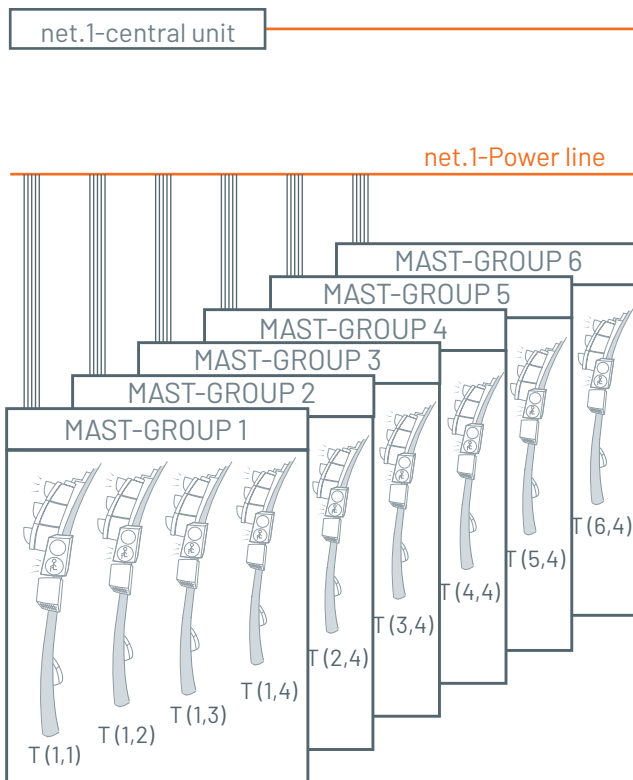


## NET.1: ECONOMICAL RETROFITTING

Until now, several wires were necessary in order to produce the various acoustic signals for traffic light signal systems (including the release signal, pilot signal and a tactile signal). Making this effort for older systems often meant that the costs were unfavorably high in comparison to the benefits.

This problem has been solved by net.1 with an intelligent fieldbus. Both the electricity supply for the push-buttons and acoustics and the transmission of selected control signals is handled via a separate signal-conducting wire between the outside unit and the control unit, which can even be wired in a line topology. Expensive underground work therefore becomes unnecessary. The effective usage of existing underground cable networks is thus possible: This makes the retrofitting of existing systems even more attractive.





LOC.ID:  
GUIDANCE FOR THE BLIND WITH PERFECT  
PROTECTION FOR LOCAL RESIDENTS

LOC.id is the name of the Bluetooth-based system that is particularly useful in the vicinity of traffic light signal systems (LZA) or where passenger information is communicated. It makes use of a free app that acts as a transmitter for blind or visually impaired persons. Alternatively, a handheld device is also available. When the user approaches a system equipped with a receiver, the device is detected and a raised orientation signal is emitted. The closer the person gets to the LZA, the quieter the signal becomes; once the person is directly at the system, the standard output volume is reached. The green light phase is still signaled by the acoustic release tone. Because this can sometimes be quite short, the pilot tone on the opposite side guides the user across the street directly to the right point in the same way. This ensures a safe crossing!

In order to fulfill the desire for a standardized solution for all needs and enable deployment everywhere, RTB is opening the interfaces to interested companies. The goal is that blind and visually impaired persons will only need one app when they are on the way.





## OPTIONS



### PUSH-BUTTONS: INTELLIGENT COMBINATION


The combination of an acoustic system and request button also offers a wide range of benefits, especially when a traffic light signal system (LZA) is properly equipped to effectively assist the blind.

#### PIT PUSH-BUTTON TYPE

With PiT push-button, the pilot signal is actuated via the central electronics of the acoustic unit. Users simultaneously hear the pilot signal from the loudspeaker and the push-button, so that it is even easier to find the traffic light mast.

#### PLUS PUSH-BUTTON TYPE



With the Plus push-button, the vibration element of the push-button is controlled by the electronics of the acoustic unit. This development makes it possible to further reduce the cost of a traffic light signal system (LZA), the cost of a traffic light signal system.




## EASY ADJUSTMENT VIA REMOTE CONTROL OR SOFTWARE

Using the **infrared remote** control, it is possible to individually configure all devices. These make it possible to regulate all device parameters, such as the adjustment of the volume to the ambient noise level, minimum and maximum volumes, drop-off rate or special solutions such as for nighttime operation. Adjustment by the technician is also made easier by the built-in microphone, which makes it possible to measure the current volume of the signal transmitter. The remote control is also used to configure net.1.

The **BLS.connect** software is a tool for configuring, documenting and analyzing the RTB acoustic signal transmitter. Consequently, signaling for the blind and visually-impaired by a traffic light signal system can be easily configured in advance on a PC. Transmission of the configuration is also carried out using the remote control, so no laptop needs to be used outdoors. In addition, the diagnostic tool makes it possible for RTB to offer an improved and speedy RTB service.

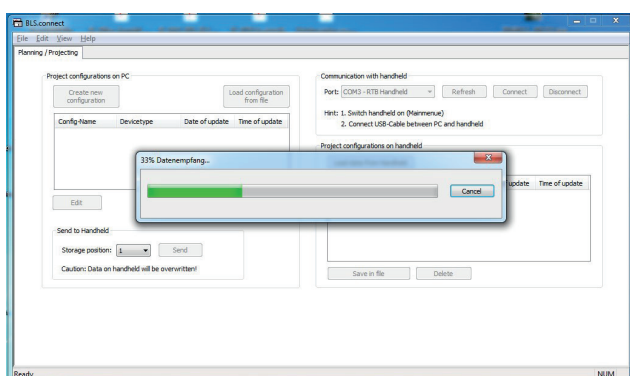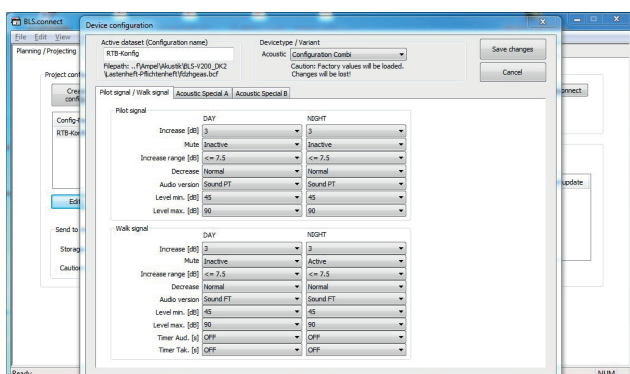



## AUTHENTIC PEOPLE. RELIABLE PRODUCTS.

That is the premise on which we operate. We aim to impress you with innovative power, excellent quality, and outstanding service. User-friendliness of our products and customer orientation are most important for us. We put our heart and soul into reliable, collaborative partnerships.

As an international company, RTB develops, produces, and distributes solutions in the traffic lights, detection and parking sectors. We have repeatedly set new standards for the industry with our bold ideas. We combine a constant willingness to innovate and dogged persistence with a natural straightforward approach. We see customers, suppliers and employees as equals, engaging in intensive dialog with them, which perhaps explains our long-term success.

**RTB**

RTB GmbH & Co. KG  
Schulze-Delitzsch-Weg 10  
DE-33175 Bad Lippspringe

Telefon +49 5252 9706-0  
Hotline +49 5252 9706-22  
Telefax +49 5252 9706-10

E-Mail [technik@rtb-bl.de](mailto:technik@rtb-bl.de)  
Internet [www.rtb-bl.de](http://www.rtb-bl.de)  
Stand 09 | 2021

Technische Änderungen und Irrtümer vorbehalten.  
Bildquelle: RTB GmbH & Co. KG, <https://stock.adobe.com/de>